

**SONY**<sup>®</sup>



Network Mini-dome Cameras

**SNC-DF85N/SNC-DF85P**

**SNC-DF80N/SNC-DF80P**

**SNC-DF50N/SNC-DF50P**


Connect Your Vision

**IPELA**<sup>™</sup>

**DynaView**

**SuperExwave**

Stunning video and audio brought to you by the "IPELA" series of visual communication products that encompass the three-pronged concept of "Reality," "Intelligence," and "Usability." "IPELA" is the identity symbolizing the Sony vision for the workplace of the future, connecting people, places, and information with reality that has never before been achieved. "IPELA" lets you share, understand, and experience as if you are actually there, when in fact, you are miles away. It allows you to quickly grasp a situation to make better business decisions.

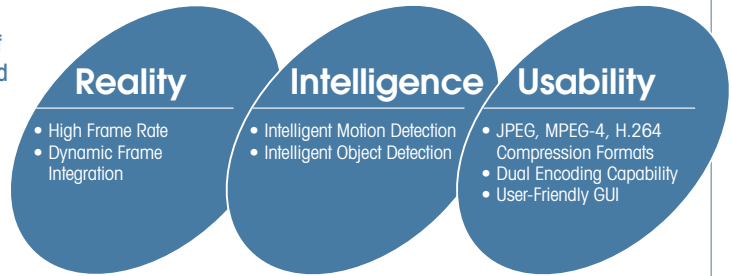

Real audiovisual communication over networks – this is business communication of the future, this is business communication brought to you today, this is "IPELA."

## Reproducing Extremely Clear and Detailed Images – Sony’s Intelligent Mini-dome Cameras Provide a High Level of Security, Anytime and Anywhere

Sony’s SNC-DF85/DF80/DF50 is an intelligent mini-dome camera lineup, designed for a variety of surveillance and monitoring applications. The SNC-DF85 combines the benefits of both the SNC-DF80 and the SNC-DF50 – the tough camera body and Day/Night function of the SNC-DF80 and the wide dynamic range of the SNC-DF50.

Housed in a heavy-duty aluminum die-cast enclosure with an impact-resistant polycarbonate dome, the SNC-DF85/DF80 offers good protection against vandalism. Furthermore, its weather-resistant design guards against damage from dust and water ingress when used in outdoor applications. In addition, the optional YT-HU75 Heater Unit\*1 is available for cold weather, enabling the camera to operate in severe temperatures as low as -40° C (-40° F). The camera’s Day/Night function provides clear monitoring images in low light conditions, such as sunset.

The SNC-DF85/DF50 incorporates DynaView Technology, which contributes to the camera’s wide dynamic range. It reduces ‘white-out’ in high-contrast shooting environments, such as when the camera is located at the entrance of a building where there is a strong backlight.

The SNC-DF85/DF80/DF50 incorporates advanced compression technologies to transmit image data in three different formats, JPEG, MPEG-4, and H.264, so that users can choose the best compression format depending on their applications. With a 3.6x zoom, vari-focal lens that covers up to 100.8°, the SNC-DF85/DF80/DF50 can be used to monitor facilities that require a wide angle of view. The PoE (Power-over-Ethernet, IEEE802.3af compliant) function gives users more freedom over where to install the cameras, while saving cost. Plus, they are all equipped with Intelligent Video Analytics to give you an intelligent and dynamic detection system.

Sony’s intelligent mini-dome cameras are ideal for a wide variety of surveillance and monitoring applications.

\*1 The YT-HU75 Heater Unit is an option.

### FEATURES AT A GLANCE

| Features                            | Benefits  | SNC-DF85             | SNC-DF80             | SNC-DF50    | Page |
|-------------------------------------|---|----------------------|----------------------|-------------|------|
| Weather-resistant and Rugged Design | Enables Outdoor Use                             | Yes (Outdoor/Indoor) | Yes (Outdoor/Indoor) | No (Indoor) | P.5  |
| Wide Dynamic Range (DynaView)       | Provides Backlight Compensation                 | Yes                  | No*2                 | Yes         | P.3  |
| Day/Night Function                  | Enables Night Monitoring, Without Visible Light | Yes                  | Yes                  | No          | P.4  |

\*2 The SNC-DF80 has a conventional backlight compensation function.


# FEATURES

## The DEPA Platform - Intelligent Video Analytics

The SNC-DF85, SNC-DF80, and SNC-DF50 cameras offer intelligent video analytics, based on the Sony DEPA platform. This comprises two elements: intelligent built-in camera functions, such as IMD and IOD, and rules/filters that determine which images should be recorded or when an alarm should be triggered.

When the network cameras perform IMD or IOD, 'tagged' objects and their associated metadata, including object position data, are sent either to the NSR Series recorder or the IMZ-RS400 Series software. These products then use the metadata, together with filters, to analyze object movement and to perform a predefined action, such as image recording or alarm triggering. This method of distributed processing minimizes server workload, network bandwidth, and storage requirements.

### Distributed Enhanced Processing Architecture (DEPA)

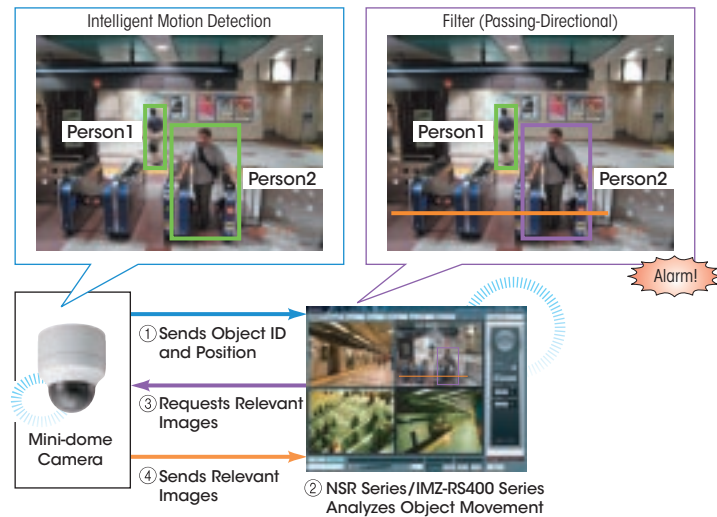

## High-quality Images

### Wide Dynamic Range With DynaView Technology SNC-DF85 SNC-DF50

The SNC-DF85 and SNC-DF50 incorporate DynaView technology, which dramatically improve camera dynamic range by 128 times when compared to conventional cameras. This results in clear image reproduction, even in extreme high-contrast environments. The cameras capture the same image twice – first with a normal shutter speed, and then with a high shutter speed. The dark areas captured at normal shutter speed and the bright areas captured at high shutter speed are then combined into one image using an advanced DSP LSI. Additionally, as these high-contrast scenes may have different lighting conditions, two white balance circuits are employed – one for normal shutter speed and the other for high shutter speed. This advanced technique reproduces high-contrast images with proper color.

### DynaView Technology




### SuperExwave Technology SNC-DF80

The SNC-DF80 incorporates an advanced 1/3-type CCD with SuperExwave technology that achieves extremely high sensitivity levels. The camera provides a minimum illumination of 0.6 lx in color and 0.06 lx in B/W at F1.3, allowing it to capture clear and detailed images even under low light conditions.

The high-quality CCD imager, in combination with the camera's state-of-the-art DSP technology, produces a high horizontal resolution of 540 TV lines via the analog composite video output, which provides amazingly clear and detailed images.

### SuperExwave Technology

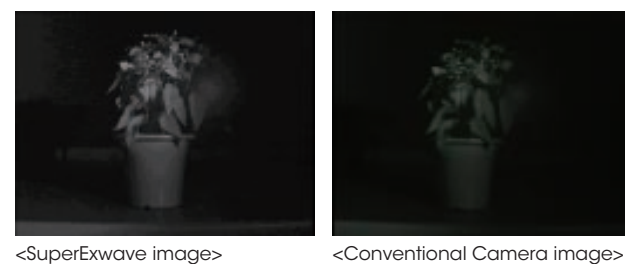

## Day/Night Function SNC-DF85 SNC-DF80

The SNC-DF85 and SNC-DF80 cameras can switch from day mode (color) to night mode (B/W) by replacing its infrared-cut filter with a clear filter. Users can toggle between the two modes in different ways, either manually, on a predefined schedule, using an external sensor, or automatically in response to the scene illumination. When the camera is in night mode, it is sensitive to near-IR illuminators, allowing it to operate even in zero lx<sup>\*3</sup> conditions.

<sup>\*3</sup> Zero lx means the absence of visible light to the naked eye. IR illuminators are required to operate at zero lx.

## Dynamic Frame Integration

These cameras incorporate Dynamic Frame Integration (DFI) technology to reproduce clear images that contain both still and moving objects. DFI technology detects movement within the image and reproduces those areas with minimal blurring, while areas with little or no movement are displayed naturally with minimal jagged edges. This unique algorithm also takes advantage of the interlaced-scan CCD, which is inherently more sensitive than progressive-scan CCDs and can provide clear images even in low light conditions.



SNC-DF85/DF80/DF50 Camera Image



Conventional Camera Image

Image Comparison Between SNC-DF85/DF80/DF50 Camera and a Conventional Camera

## JPEG Picture Quality Settings With Constant Bitrate Algorithm

Users can preset the JPEG picture quality for these cameras from a choice of ten levels. In addition, because these cameras incorporate a constant bitrate algorithm, they can limit the data bitrate while still maintaining high-quality images. This is useful for calculating the required storage capacity and bandwidth during installation.

## Flexible and Easy Installation

### Wall- or Ceiling-mountable/Easy Viewing-angle Adjustment

The SNC-DF85, SNC-DF80, and SNC-DF50 can be easily wall- or ceiling-mounted.<sup>\*4</sup> Furthermore, because they are equipped with an analog composite output (RCA jack), the camera image can be monitored locally while the viewing angle is adjusted during installation. This makes focus and viewing-angle adjustment both accurate and easy.

<sup>\*4</sup> Supplied bracket is required when the SNC-DF85 and SNC-DF80 are wall- or ceiling-mounted.




Ceiling Surface Mount (SNC-DF50)



Ceiling Flush Mount (SNC-DF50/YT-ICB45 Ceiling Mount Bracket)

## Powerful 3.6x Zoom, Vari-focal Lens

These cameras come equipped with a 3.6x zoom, vari-focal lens that covers an extremely wide range of viewing angles from 100.8° (wide-angle) to 27.7° (telephoto). This feature provides great installation flexibility for a number of different applications and locations.

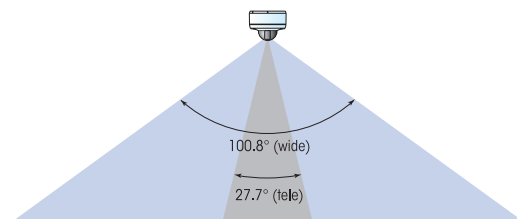

## Ball-Joint Lens Mount Technology

With the Sony patented Ball-Joint Lens Mount mechanism incorporated into the vari-focal lens of these cameras, the lens can be rotated freely in any direction. Unlike conventional cameras, it takes only one action to adjust the pan and tilt angles, allowing for quick and easy adjustment of the camera's viewing angle during installation.




Sony Patented Ball-Joint Lens Mount

## Ruggedized Design SNC-DF85 SNC-DF80

The vandal-resistant SNC-DF85 and SNC-DF80 cameras are housed in a heavy-duty, aluminum die-cast enclosure with an impact-resistant polycarbonate dome. It complies with the IP66<sup>\*5</sup> standard, and offers additional water resistance by using a special inner conduit for the camera cables. For cold-weather outdoor applications, the optional YT-HU75 Heater Unit is available. This allows the camera to be used in severe temperatures as low as -40 °C (-40 °F).

<sup>\*5</sup> Ingress Protection (IP) standard is a system for numerically classifying the degree of protection provided by enclosures of electrical equipment against solid objects and liquids. IP66 means there is no ingress of dust and the equipment is protected against powerful water jets.

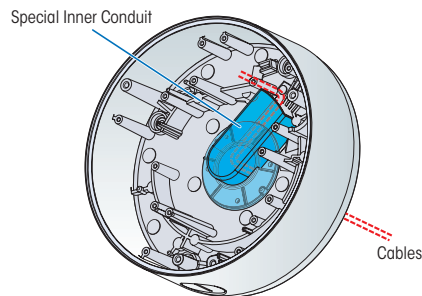

Water-resistant Design (SNC-DF85/DF80 inside)


## Operational Flexibility

### Selectable JPEG, MPEG-4, H.264 Compression Formats

These multi-codec cameras support three compression formats: JPEG, MPEG-4, and H.264. The industry-standard JPEG compression format is the best choice for high-quality still images. MPEG-4 provides clear moving images efficiently over networks when bandwidth is limited. And H.264 provides twice the efficiency of MPEG-4, for when bandwidth is even more limited.

### Dual-encoding Capability

With a dual-encoding capability, these cameras can generate both MPEG-4 and JPEG images simultaneously. For example, the system can be set up to transfer MPEG-4 images over a WAN or an Internet VPN where network bandwidth is limited, while storing high-resolution JPEG images on a server that's configured on your LAN.

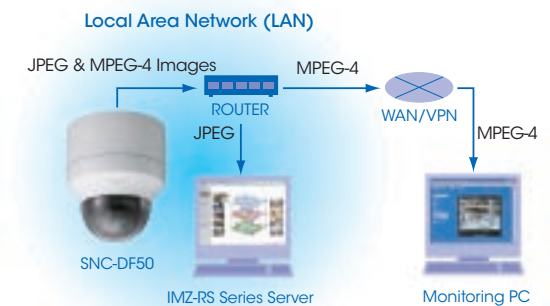

Dual Image Encoding

### Bi-directional Audio

Users can connect an external microphone to these cameras in order to pick up audio from a preferred location. They are also equipped with an active speaker output, enabling users to sound an alert or make an announcement from the camera unit via a remote location. This significantly expands the possibilities of monitoring applications.

### Voice Alert

The Voice Alert function allows users to upload up to three pre-recorded audio files to the camera. These can then be played out via a locally connected speaker upon an alarm trigger.

## High Level of Security

### Intelligent Motion Detection (IMD)

The built-in IMD function can trigger a variety of actions, such as the storage and transfer of images or the activation of an external device through its output relays. False alarms caused by noise and repeated motion patterns are minimized thanks to an advanced Sony algorithm. Plus, when used in conjunction with DEPA-enabled recorders or software, a multitude of filter functions are available. These allow you to initiate alarms based on more specific movements, such as passing a virtual borderline or appearing into a virtual area.

### Intelligent Object Detection (IOD)\*<sup>6</sup>

The SNC-DF85, SNC-DF80, and SNC-DF50 cameras can detect objects that have been abandoned or become stationary for a specified duration within up to four designated detection areas. This feature is useful for detecting suspicious objects left in public places, or for detecting stalled cars or accidents on the road. As with IMD, filters can be used to refine this intelligence if the camera is configured with DEPA-enabled products.

<sup>6</sup>The intelligent object detection function and the intelligent motion detection function cannot be used simultaneously.

### Sensor IN/Alarm OUT Ports

Equipped with a sensor input, these cameras can receive triggers from an external sensor. Also, two alarm relay outputs can be used to trigger external devices to perform a variety of actions.

### Pre-/Post-alarm Image Storage

These cameras are capable of storing both pre- and post-alarm images on 16 MB of built-in memory or on removable storage media.<sup>7</sup>

<sup>7</sup>Storage on removable media is available with the SNC-DF85 and SNC-DF80.

## Network Security Features

### IEEE802.1X Compliant

The SNC-DF85, SNC-DF80, and SNC-DF50 support IEEE802.1X port-based network access control. This means they can be integrated to a network environment that uses the IEEE802.1X client-authorization protocol for security purposes.

## Versatile Interfaces

### Analog Composite Video Output

These cameras can output an analog composite video signal via the BNC connector. This feature is ideal for outputting images to a local recording device or monitor.

## Other Convenient Features

### Date/Time Superimposition

The date and time of images recorded by these cameras can be superimposed on the video while it is being monitored and recorded. This feature is ideal for easily identifying the exact date and time of an event during playback. Also because the information becomes part of the video image, it is a useful feature when providing video evidence to authorities.

### File Export to Removable Media

SNC-DF85 SNC-DF80

The SNC-DF85 and SNC-DF80 cameras are equipped with a Compact Flash™ (CF) card slot, allowing users to export images on CF media as required.



CF Card Slot

### Privacy Zone Masking\*<sup>8</sup>

These cameras can mask up to seven unwanted or prohibited areas within an image for privacy protection.

<sup>8</sup>Supplied "SNC Privacy Masking Tool" software is required to set masking areas.

### 24 V AC, 12 V DC, or PoE Operation


These cameras offer a choice of three types of power: 24 V AC, 12 V DC, or PoE (Power-over-Ethernet, IEEE 802.3af). They automatically adapt to whichever power source is used, making installation fast and effective.

### Network Features


- Simultaneous Access for up to 20 Users
- Multicasting Capability

# SYSTEM CONFIGURATIONS


## Stand-alone Configuration

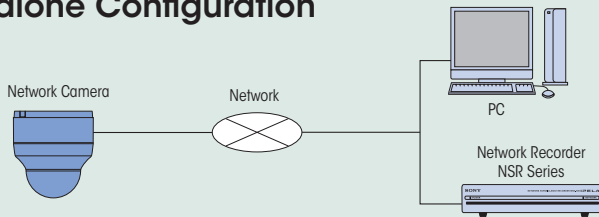

## Client-server Configuration

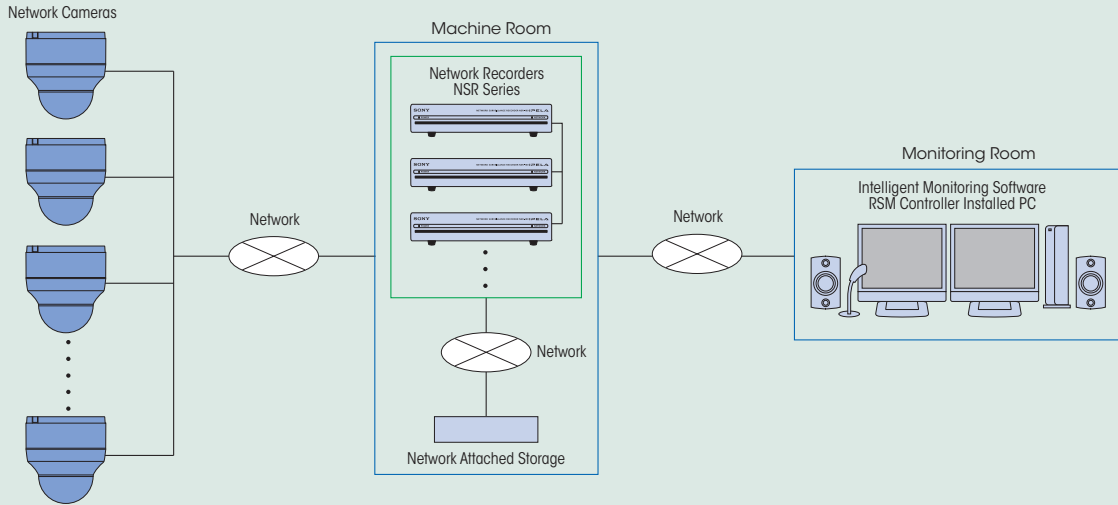

# DIMENSIONS

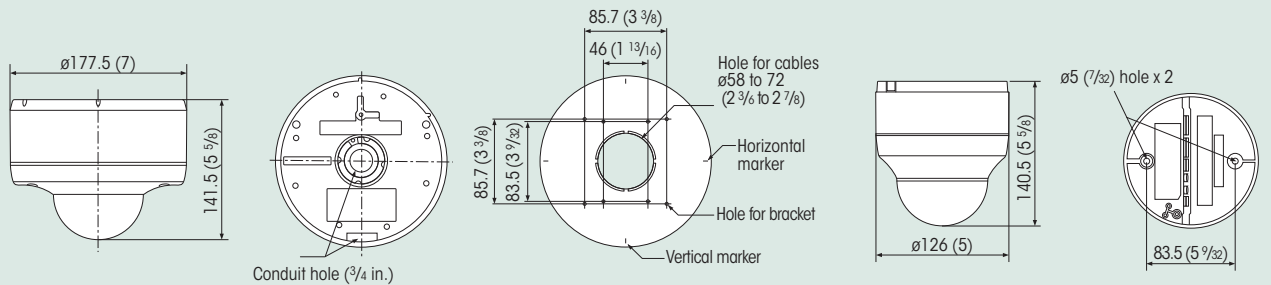

SNC-DF85N/SNC-DF85P  
SNC-DF80N/SNC-DF80P

Template

SNC-DF50N/SNC-DF50P

Unit: mm (inches)

# OPTIONAL ACCESSORIES



**YT-ICB45**  
In-Ceiling Mount Bracket



**YT-HU75**  
Heater Unit

SNC-DF85 SNC-DF80

# SPECIFICATIONS

|  | SNC-DF85N   | SNC-DF85P                               | SNC-DF80N   | SNC-DF80P                               | SNC-DF50N  | SNC-DF50P                               |
|--|---|---|---|---|--|---|
| <b>Camera</b>                              |   |   |   |   |  |   |
| Image device                               | 1/3-type CCD with DynaView Technology   |   | 1/3-type CCD with SuperExwave Technology                                  |   | 1/3-type CCD with DynaView Technology  |   |
| Number of effective pixels (H x V)         | 380,000 (768 x 494)   | 440,000 (752 x 582)                     | 380,000 (768 x 494)   | 440,000 (752 x 582)                     | 380,000 (768 x 494)  | 440,000 (752 x 582)                     |
| Electronic shutter                         | 1/60 to 1/10,000 s  |   | 1/60 to 1/10,000 s  |   | 1/60 to 1/10,000 s   |   |
| Auto gain control                          | Auto, EV compensation, DynaView   |   | On/Off (0 dB to +24 dB)   |   | Auto, EV compensation, DynaView  |   |
| Exposure control                           | Auto, Backlight compensation  |   |   |   |  |   |
| White balance mode                         | ATW, ATW Pro  |   |   |   |  |   |
| Lens type                                  | Vari-focal lens   |   |   |   |  |   |
| Zoom ratio                                 | 3.6x optical zoom (1.5x digital zoom)   |   |   |   |  |   |
| Horizontal viewing angle                   | 100.8° to 27.7°   |   |   |   |  |   |
| Focal length                               | f=2.8 to 10.0 mm  |   |   |   |  |   |
| F-number                                   | F1.3 (wide), F3.0 (tele)  |   |   |   |  |   |
| Minimum object distance                    | 300 mm  |   |   |   |  |   |
| <b>Image</b>                               |   |   |   |   |  |   |
| Image size (H x V)                         | 640 x 480, 320 x 240, 160 x 120 (JPEG, MPEG-4, H.264)   |   |   |   |  |   |
| Compression format                         | JPEG, MPEG-4, H.264   |   |   |   |  |   |
| Maximum frame rate<br>JPEG/MPEG-4<br>H.264 | 30 fps (640 x 480)<br>10 fps (640 x 480)  | 25 fps (640 x 480)<br>8 fps (640 x 480) | 30 fps (640 x 480)<br>10 fps (640 x 480)                                  | 25 fps (640 x 480)<br>8 fps (640 x 480) | 30 fps (640 x 480)<br>10 fps (640 x 480)   | 25 fps (640 x 480)<br>8 fps (640 x 480) |
| <b>Audio</b>                               |   |   |   |   |  |   |
| Audio compression                          | G.711/G.726 (40, 32, 24, 16 Kb/s)   |   |   |   |  |   |
| <b>Network</b>                             |   |   |   |   |  |   |
| Protocols                                  | TCP/IP, HTTP, ARP, ICMP, FTP, SMTP, DHCP, SNMP, DNS, NTP, RTP/RTCP  |   |   |   |  |   |
| Number of clients                          | 20  |   |   |   |  |   |
| Authentication                             | IEEE802.1X  |   |   |   |  |   |
| <b>Interface</b>                           |   |   |   |   |  |   |
| Ethernet                                   | 10Base-T/100Base-TX (RJ-45)   |   |   |   |  |   |
| Card slot                                  | CF card x1  |   |   |   |  |   |
| Analog video output                        | BNC x1, 1.0 Vp-p, 75 Ω, RCA x 1   |   |   |   |  |   |
| I/O port                                   | Sensor in x 1, Alarm out x 2  |   |   |   |  |   |
| External microphone input                  | Mini-jack (monaural, 2.2 K 2.5 V plug-in power)   |   |   |   |  |   |
| Audio line output                          | Mini-jack (monaural), max output level: 1 Vrms  |   |   |   |  |   |
| <b>Analog video output</b>                 |   |   |   |   |  |   |
| Signal system                              | NTSC (Composite)  | PAL (Composite)                         | NTSC (Composite)  | PAL (Composite)                         | NTSC (Composite)   | PAL (Composite)                         |
| Horizontal resolution                      | 480 TV lines  |   | 540 TV lines  |   | 480 TV lines   |   |
| S/N ratio                                  | more than 50 dB   |   |   |   |  |   |
| Min. illumination                          | Color: 0.7 lx (50IRE, F1.3, AGC ON)<br>B/W: 0.15 lx (50IRE, F1.3, AGC ON)   |   | Color: 0.6 lx (50IRE, F1.3, AGC ON)<br>B/W: 0.06 lx (50IRE, F1.3, AGC ON) |   | 0.7 lx (50IRE, F1.3, AGC ON)   |   |
| <b>General</b>                             |   |   |   |   |  |   |
| Mass                                       | Approx. 1.8 kg (3 lb 15 oz)   |   |   |   | Approx. 920 g (2 lb)   |   |
| Dimensions (Ø x H)                         | 177.5 x 141.5 mm (7 x 5 5/8 inches)   |   |   |   | 126 x 140.5 mm (5 x 5 5/8 inches)  |   |
| Power requirements                         | PoE (IEEE-802.3af)/AC24V/DC12 V   |   |   |   |  |   |
| Power consumption                          | 10 W max.   |   |   |   | 9 W max.   |   |
| Operating temperature                      | -10 to 50 °C (14 to 122 °F)<br>-40 to 50 °C (-40 to 122 °F) w/heater unit   |   |   |   | -10 to 50 °C (14 to 122 °F)  |   |
| Storage temperature                        | -20 to 60 °C (-4 to 140 °F)   |   |   |   |  |   |
| <b>Supplied accessories</b>                |   |   |   |   |  |   |
|  | Bracket, Template, Torx wrench, M4 screws (4), Wire rope, M4 shoulder screw, Audio cable, I/O cable, CD-ROM (User's guide, IP setup program, Audio Upload Tool, Privacy Masking Tool, Video Player, Custom Homepage Installer), Installation manual |   |   |   | Template, Wire rope, M4 shoulder screw, AC power cord, Monitor cable, CD-ROM (User's guide, IP setup program, Audio Upload Tool, Privacy Masking Tool, Video Player, Custom Homepage Installer), Installation manual |   |
| <b>System requirements</b>                 |   |   |   |   |  |   |
| Operating system                           | Microsoft® Windows® 2000/XP   |   |   |   |  |   |
| Processor                                  | CPU: Intel® Pentium® IV 1.5 GHz or higher (2.4 GHz or higher is recommended)  |   |   |   |  |   |
| Memory                                     | RAM: 256 MB or more   |   |   |   |  |   |
| Web browser                                | Microsoft Internet Explorer® Ver. 6.0   |   |   |   |  |   |

## NOTES

\* The SNC-DF85N/DF85P, SNC-DF80N/DF80P, and SNC-DF50N/DF50P include software developed by the OpenSSL project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)  
 \* The SNC-DF85N/DF85P, SNC-DF80N/DF80P, and SNC-DF50N/DF50P include cryptographic software written by Eric Young (eay@cryptsoft.com)

## REAR PANEL



SNC-DF50N/DF50P

Distributed by

© 2008 Sony Corporation. All rights reserved.  
 Reproduction in whole or in part without written permission is prohibited.  
 Features and specifications are subject to change without notice.  
 All non-metric weights and measurements are approximate.  
 Projected images in this brochure are simulated.  
 Sony is a registered trademark of Sony Corporation.  
 All other trademarks are the property of their respective owners.